

Product technical datasheet

UV-C STERILION 72W / 108W

LENA
LIGHTING

PUBLIC UTILITY




- Body colour : white
- Disinfection efficiency: 25m² (72W) 35m² (108W)
- Lifespan: 8000h
- Comprehensive disinfection time: 2h
- Supply voltage: 220-240V
- Ingress protection IP 20
- Rubber cable 5m (H07RN-F)
- Ergonomic movable handle
- Adapted for mounting on a Future Stand tripod
- Dimensions (A/B/C) [mm]: 285/495/110

UVC lamps emitting ultraviolet light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. It is enough to direct the UV lamp directly onto the surface for a specified time to effectively kill microorganisms. They are so powerful that they may produce harmful effects on human skin or eyes. Therefore, basic safety precautions should be observed when using UVC lamps for disinfection, i.e. you should not stay within the range of the light beam.

Lamps with higher power (108 W) will prove well in a room up to 35 m², those with the wattage of 72 W are designed for areas of up to 25m². There are recommended for use in healthcare facilities, grocery stores, public and private means of transport, at petrol stations, in courier companies, public administration and educational establishments and at private homes and cars.

Accessories




Future Stand tripod

Mounting without tools

index: 000737

Technical drawing

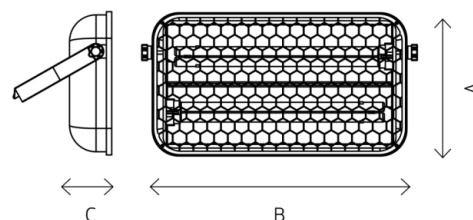

Available lamp models:

Power [W]	Lifespan of UV-C source [h]	Plug	Cable length	Protection class	Supply voltage	Weight	Index
108	8000	UNI-SCHUKO	5m	II	220-240V	3,8	243967
72	8000	UNI-SCHUKO	5m	II	220-240V	3,7	243905

Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the booklet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.